OPEN FRAME MONITOR

□ Specification

Model Name	TSCHA-1900
Size	19 inch
Active Area(mm)	376.32(H) X 301.06(V)
Pixel Pitch(mm)	0.294(H) X 0.294(V)
Resolution	1280(H) X 1024(V)
Contrast Ratio	1000 : 1 (Typ)
Display Color	16.7M
Response time (R + F)	5 ms (typ)
Brightness(cd/m²)	Тур. 250
Viewing Angle (L/R/U/D)	85/85/80/80
Operating Temperature	0 ~ 50 'C
Storage Temperuatre	0 ~ 50 'C
Signal Connector	(RGB, DVI)
Frame	Chassis Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	17.8W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	4.4 Kg
Packing Information	490x360x470(H)mm (3pcs/17Kg)



< Option >

	-
Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Open, Panel Mount, Rack Mount
Touch Screen	PCAP, IR, RES, SCAP, SAW, Glass
Dimming	Auto, Knob, Manual
temperature control	Heating , Cooling


* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

^{*} Specifications are subject to change without notice.

CHASSIS FRAME MONITOR

Mechanical Drawing

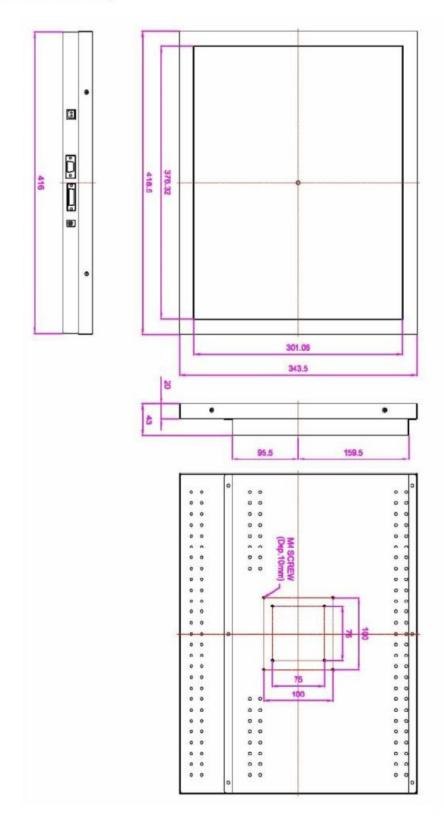

^{*} Specifications are subject to change without notice.