CHASSIS FRAME MONITOR

□ Specification

| Model Name | TSCHA-W2413 |
|-------------------------|---|
| Size | 24 inch Wide |
| Active Area(mm) | 518.4(H) X 324(V) |
| Pixel Pitch(mm) | 0.270(H) X 0.270(V) |
| Resolution | 1920(H) X 1200(V) |
| Contrast Ratio | 1000 : 1 (Typ) |
| Display Color | 16.7M |
| Response time (R + F) | 14 ms (typ) |
| Brightness(cd/m²) | Тур. 300 |
| Viewing Angle (L/R/U/D) | 89/89/89 |
| Operating Temperature | 0 - 50 'C |
| Storage Temperuatre | 0 - 50 'C |
| Signal Connector | (RGB, DVI) |
| Frame | Chassis Frame |
| Power Source | 12V DC in, with External AC to DC Adapter |
| Power Consumption | TBD |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Product weight | 6.2 Kg |
| Packing Information | 650x160x450(H)mm (1pcs/ 8.0Kg) |



| < Option > | | |
|---------------------|-------------------------------|--|
| Signal Connector | HDMI, DP, S-Video, CVBS | |
| Power source | DC 24V, AC 110~220V | |
| Frame type | Open, Panel Mount, Rack Mount | |
| Touch Screen | PCAP, RES, SCAP, Glass | |
| Dimming | Auto, Knob, Manual | |
| temperature control | Heating , Cooling | |


* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)

^{*} Specifications are subject to change without notice.

CHASSIS FRAME MONITOR

Mechanical Drawing

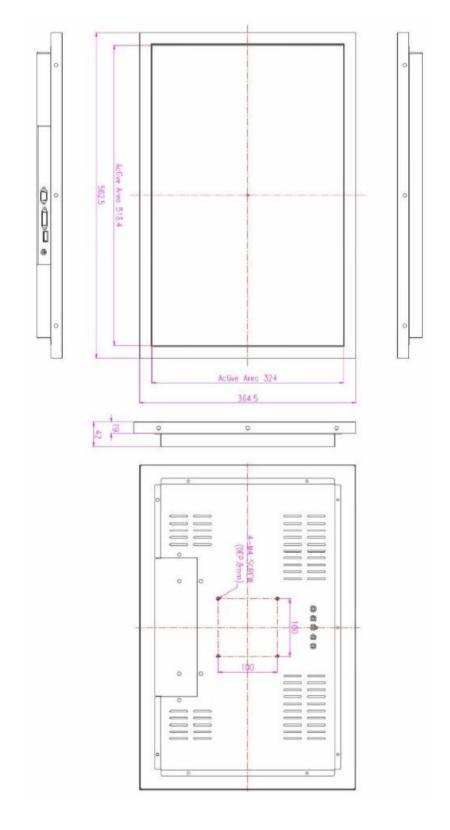

^{*} Specifications are subject to change without notice.