PANEL MOUNT FRAME MONITOR

□ Specification

Model Name	TSINE-1700
Size	17 inch
Active Area(mm)	337.920(H) X 270.336(V)
Pixel Pitch(mm)	0.264(H) X 0.264(V)
Resolution	1280(H) X 1024(V)
Contrast Ratio	1000 : 1 (Typ)
Display Color	16.7M
Response time (R + F)	5 ms (typ)
Brightness(cd/m²)	Тур. 250
Viewing Angle (L/R/U/D)	85/85/80/80
Operating Temperature	0 ~ 50 'C
Storage Temperuatre	0 ~ 50 'C
Signal Connector	(RGB, DVI)
Frame	Panel Mount Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	15.6 W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	4 Kg
Packing Information	500x400x130(H)mm (1pcs/ 6Kg)






< Option >	
Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Open, Chassis, Rack Mount
Touch Screen	Resistive, IR, Glass
Dimming	Auto, Knob, Manual
temperature control	Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

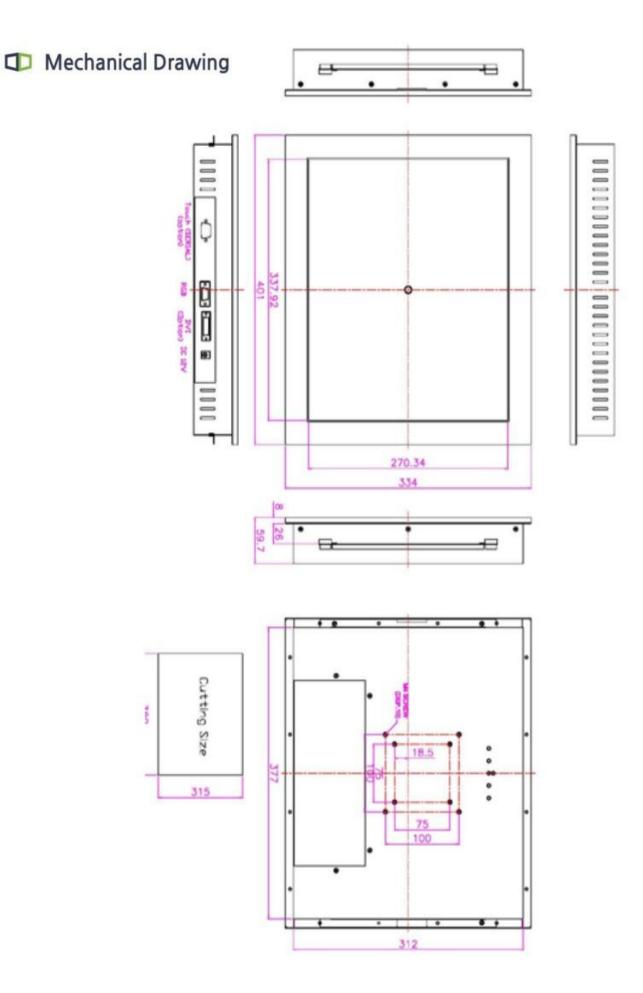

^{*} Specifications are subject to change without notice.