

PANEL MOUNT FRAME MONITOR

Specification

Model Name	TSINE-W3211
Size	32 inch Wide
Active Area(mm)	724.4(H) X 429(V)
Pixel Pitch(mm)	0.36375(H) X 0.36375(V)
Resolution	1920(H) X 1080(V)
Contrast Ratio	1300 : 1 (Typ)
Display Color	16.7M
Response time (R + F)	25 ms (typ)
Brightness(cd/m ²)	Typ. 400
Viewing Angle (L/R/U/D)	89/89/89/89
Operating Temperature	0 - 50 'C
Storage Temperuatre	0 - 50 'C
Signal Connector	(RGB, DVI)
Frame	Panel Mount Frame
Power Source	AC 110~220V
Power Consumption	44.8W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	TBD
Packing Information	TBD



< Option >


Signal Connector	HDMI, DP, S-Video, CVBS
Power source	-
Frame type	Open, Chassis, Rack Mount
Touch Screen	IR, Glass
Dimming	Auto, Knob, Manual
temperature control	Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

PANEL MOUNT FRAME MONITOR

Mechanical Drawing

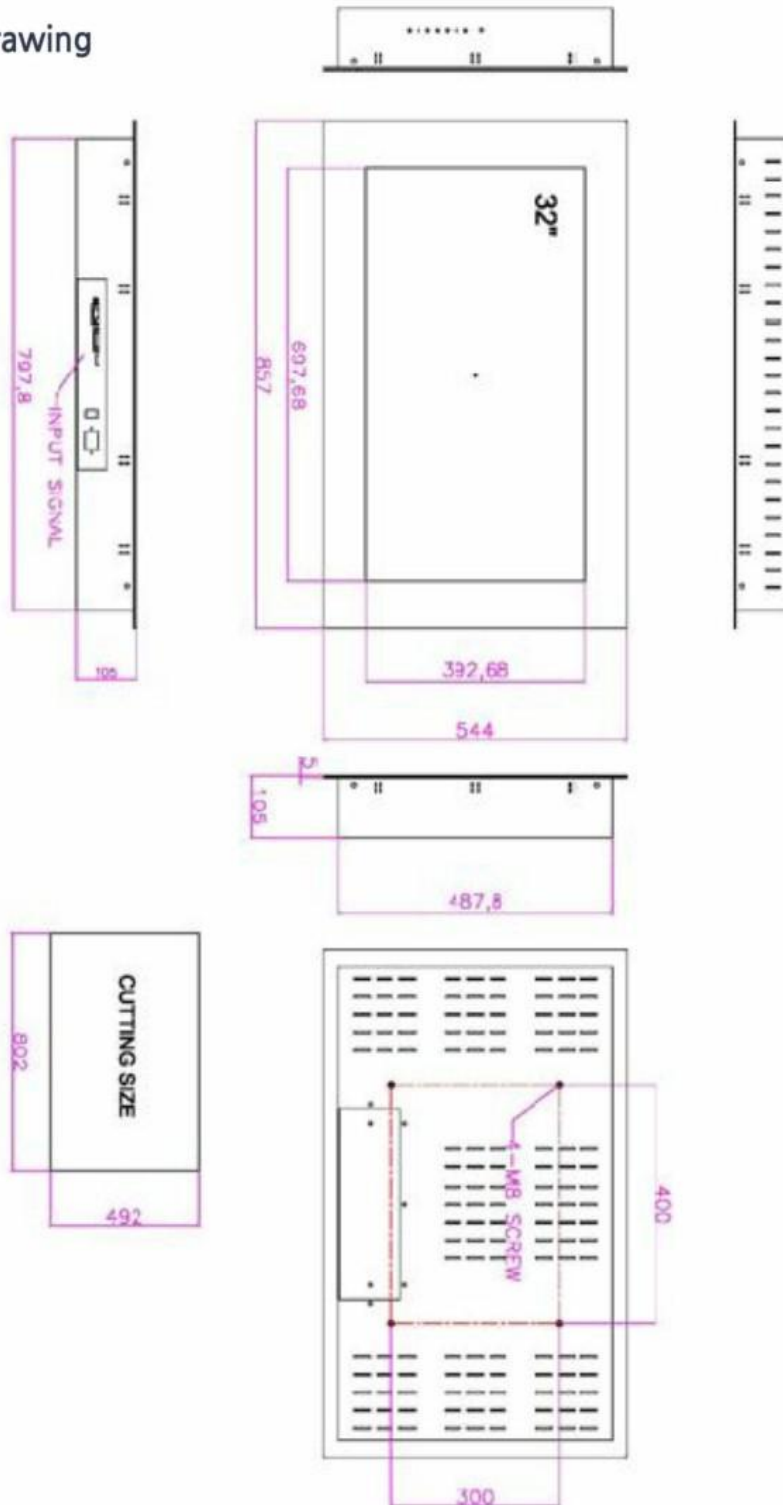

* Specifications are subject to change without notice.