

# HIGH BRIGHTNESS MONITOR

## Mechanical Drawing

<b>Model Name</b>	TSVH-1041
Size	10.4 inch
Active Area(mm)	210.4(H) X 157.8(V)
Pixel Pitch(mm)	0.2055(H) X 0.2055(V)
Resolution	1024(H) X 768(V)
Contrast Ratio	1400 : 1 (Typ)
Display Color	262K, 16.2M
Response time (R + F)	16 ms (typ)
<b>Brightness(cd/m<sup>2</sup>)</b>	<b>Min. 660</b>
	<b>Typ. 700</b>
Viewing Angle (L/R/U/D)	89 / 89 / 89 / 89
Operating Temperature	-30'C ~ 80'C
Storage Temperuatre	-30'C ~ 80'C
Signal Connector	(RGB, DVI)
Frame	Open Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	15 W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	1.4 Kg
Packing Information	390x330x130(H)mm (1pcs/ 3.3Kg)







### < Option >

Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Chassis, Panel Mount, Rack Mount
Touch Screen	PCAP, IR, RES, SCAP, SAW
Dimming	Auto, Knob, Manual
Temperature control	Heating , Cooling

#### \* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

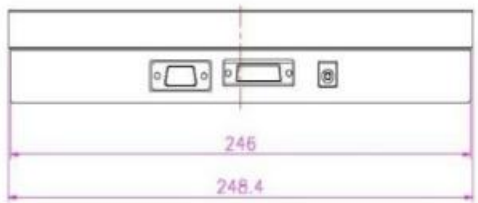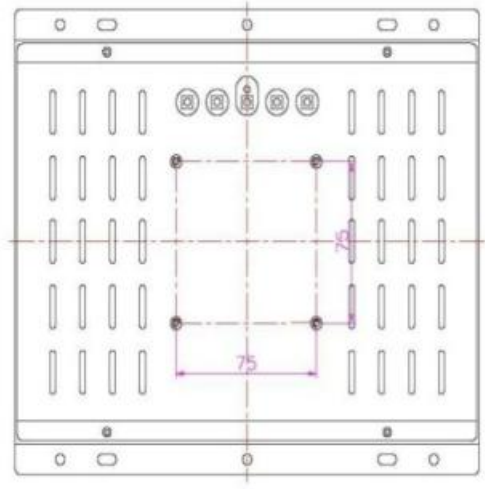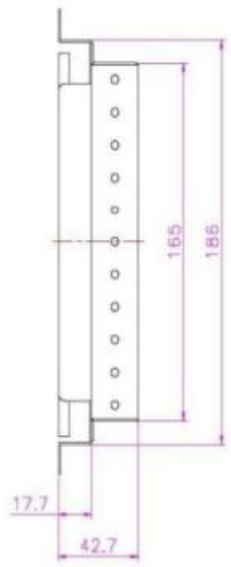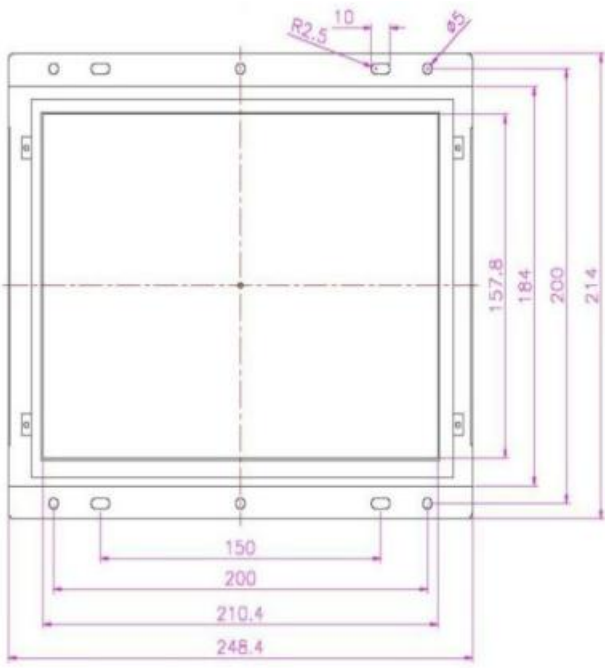

\* Drawing is subject to change according to the specification