

HIGH BRIGHTNESS MONITOR

Mechanical Drawing

Model Name	TSVH-1212
Size	12.1 inch
Active Area(mm)	245.76(H) X 184.32(V)
Pixel Pitch(mm)	0.24(H) X 0.24(V)
Resolution	1024(H) X 768(V)
Contrast Ratio	800 : 1 (Typ)
Display Color	262K, 16.2M
Response time (R + F)	16 ms (typ)
Brightness(cd/m²)	Min. 950
	Typ. 1000
Viewing Angle (L/R/U/D)	80/80/80/80
Operating Temperature	-20'C ~ 70'C
Storage Temperuatre	-30'C ~ 80'C
Signal Connector	(RGB, DVI)
Frame	Open Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	T.B.D
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	2 Kg
Packing Information	390x330x130(H)mm (1pcs/ 4Kg)




< Option >

Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Chassis, Panel Mount, Rack Mount
Touch Screen	PCAP, IR, RES, SCAP, SAW
Dimming	Auto, Knob, Manual
Temperature control	Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

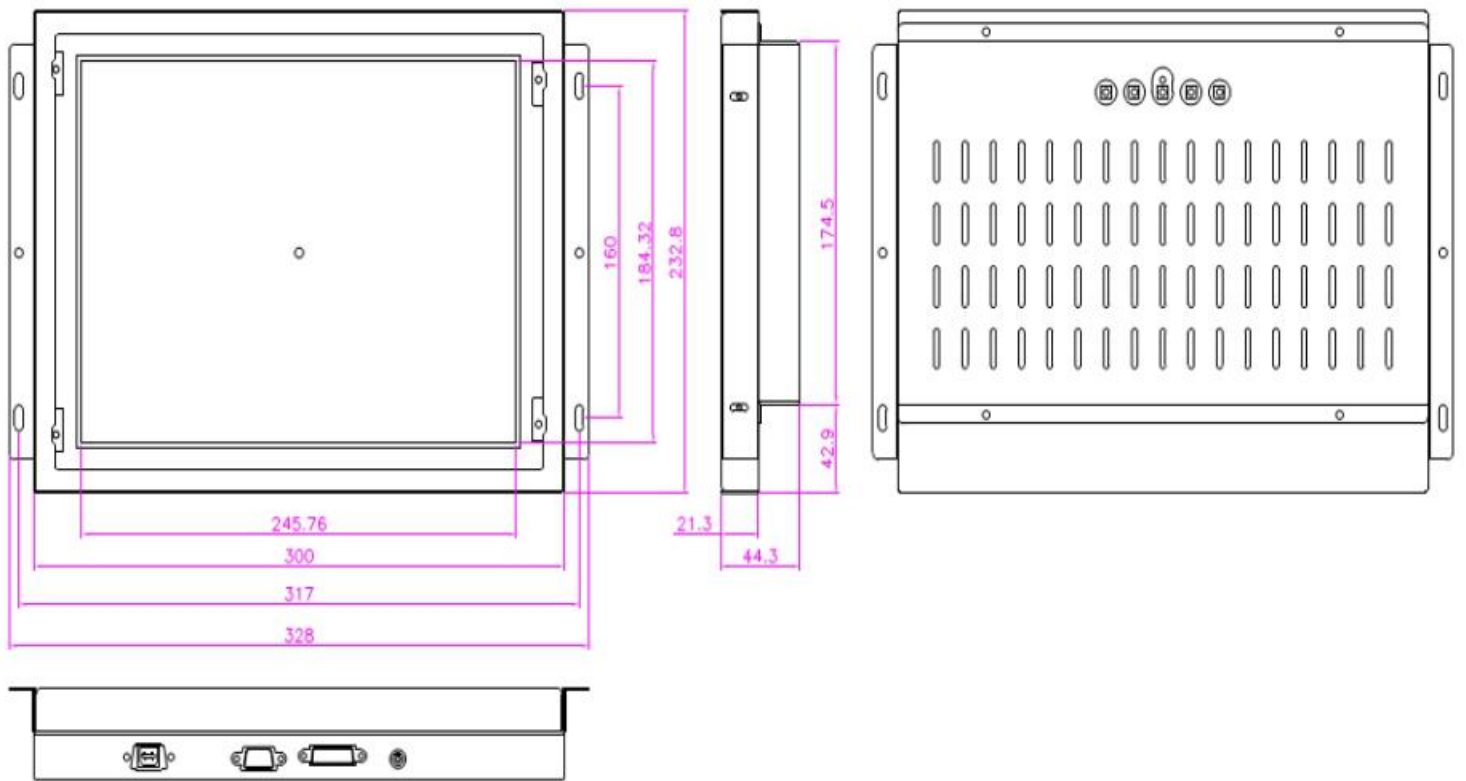

* Drawing is subject to change according to the specification