

HIGH BRIGHTNESS MONITOR

Model Name	TSVH-1902
Size	19 inch
Active Area(mm)	376.32(H) x 301.06(V)
Pixel Pitch(mm)	0.294(H) x 0.294(V)
Resolution	1280(H) X 1024(V)
Contrast Ratio	1000 : 1 (Typ)
Display Color	16.7 M
Response time (R + F)	14 ms (Typ)
Brightness(cd/m²)	Min. 900
	Typ. 1000
Viewing Angle (L/R/U/D)	89 / 89 / 89 / 89
Operating Temperature	0 - 50 'C
Storage Temperuatre	-20 - 60 'C
Signal Connector	(RGB, DVI)
Frame	Open Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	T.B.D
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	4.5 Kg
Packing Information	540x460x140(H)mm (1pcs/ 6.5Kg)




< Option >

Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Chassis, Panel Mount, Rack Mount
Touch Screen	PCAP, IR, RES, SCAP, SAW
Dimming	Auto, Knob, Manual
Temperature control	Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimmin (Zero Dimmin : lease ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

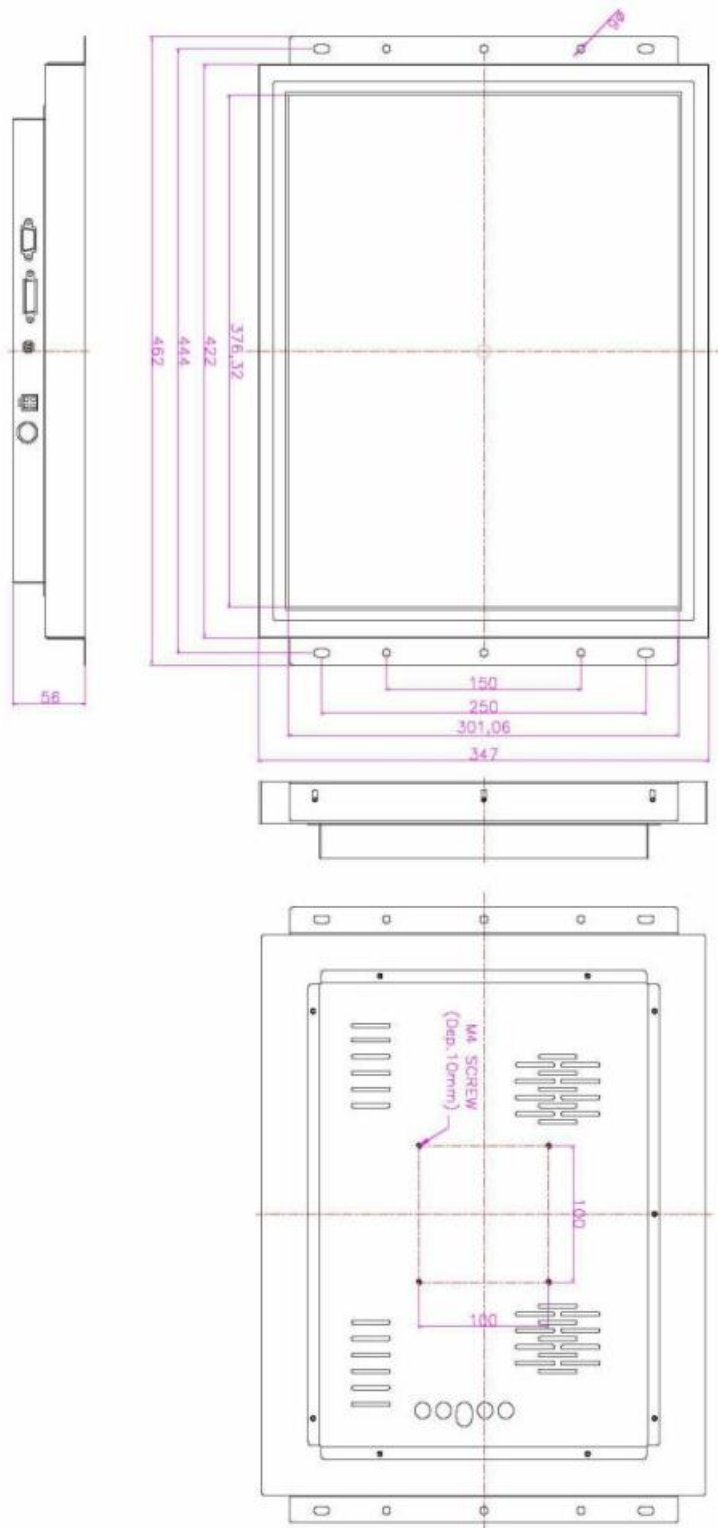

* Drawing is subject to change according to the specification