HIGH BRIGHTNESS MONITOR

Model Name	TSVH-W1561
Size	15.6 inch Wide
Active Area(mm)	344.16(H) X 193.59(V)
Pixel Pitch(mm)	0.17925(H) X 0.17925(V)
Resolution	1920(H) X 1080(V)
Contrast Ratio	800 : 1 (Typ)
Display Color	16.2M
Response time (R + F)	25 ms (typ)
Brightness(cd/m²)	Min. 900
	Тур. 1000
Viewing Angle (L/R/U/D)	89/89/89
Operating Temperature	-10'C ~ 60'C
Storage Temperuatre	-20'C ~ 60'C
Signal Connector	(RGB, DVI)
Frame	Open Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	26W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	3 Kg
Packing Information	490x400x140(H)mm. 4Kg (1pc/box)




< Option >		
Signal Connector	HDMI, DP, S-Video, CVBS	
Power source	DC 24V, AC 110~220V	
Frame type	Chassis, Panel Mount, Rack Mount	
Touch Screen	PCAP, Resistive, Glass	
Dimming	Auto, Knob, Manual	
Temperature control	Heating , Cooling	

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

HIGH BRIGHTNESS MONITOR

Mechanical Drawing

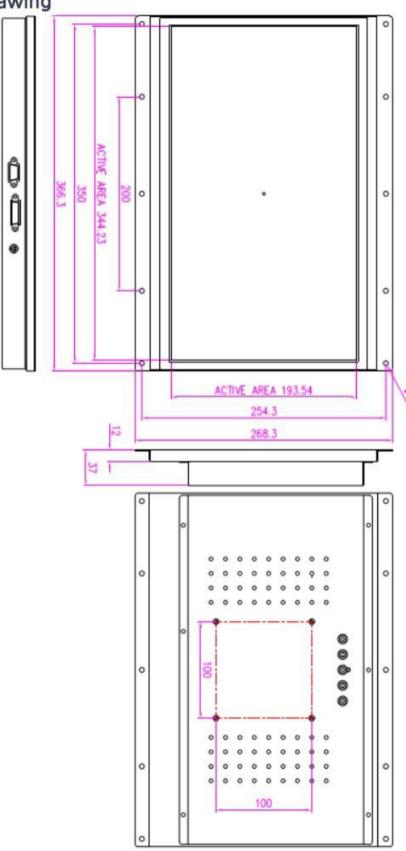

 $[\]hbox{*\it Drawing is subject to change according to the specification}$