

# WIDE TEMPERATURE MONITOR


## Specification

|                                |   |
|--------------------------------|---|
| <b>Model Name</b>              | TSW-1213                                  |
| Size                           | 12.1 inch                                 |
| Active Area(mm)                | 245.76(H) X 184.32(V)                     |
| Pixel Pitch(mm)                | 0.24(H) X 0.24(V)                         |
| Resolution                     | 1024(H) X 768(V)                          |
| Contrast Ratio                 | 800 : 1 (Typ)                             |
| Display Color                  | 262K, 16.7M                               |
| Brightness(cd/m <sup>2</sup> ) | 350 (Typ)                                 |
| Viewing Angle (L/R/U/D)        | 80 / 80 / 80 / 80                         |
| <b>Temperature Range</b>       | <b>-20°C ~ 70°C</b>                       |
| Signal Connector               | (RGB, DVI)                                |
| Optional Signal Connector      | HDMI, S-Video, CVBS                       |
| Power Source                   | 12V DC in, with External AC to DC Adapter |
| Power Consumption              | 17W                                       |
| Power Management               | VESA DPMS Compliant                       |
| Plug & Play                    | VESA DDC 1/2B                             |
| Option Touch screen            | T B D                                     |
| Product weight                 | 2 Kg                                      |
| Packing Information            | 390x330x130(H)mm (1pcs/ 4Kg)              |



**\*\* Prevention of condensation using insulated water repellent silicone coating \*\***

## Mechanical Drawing

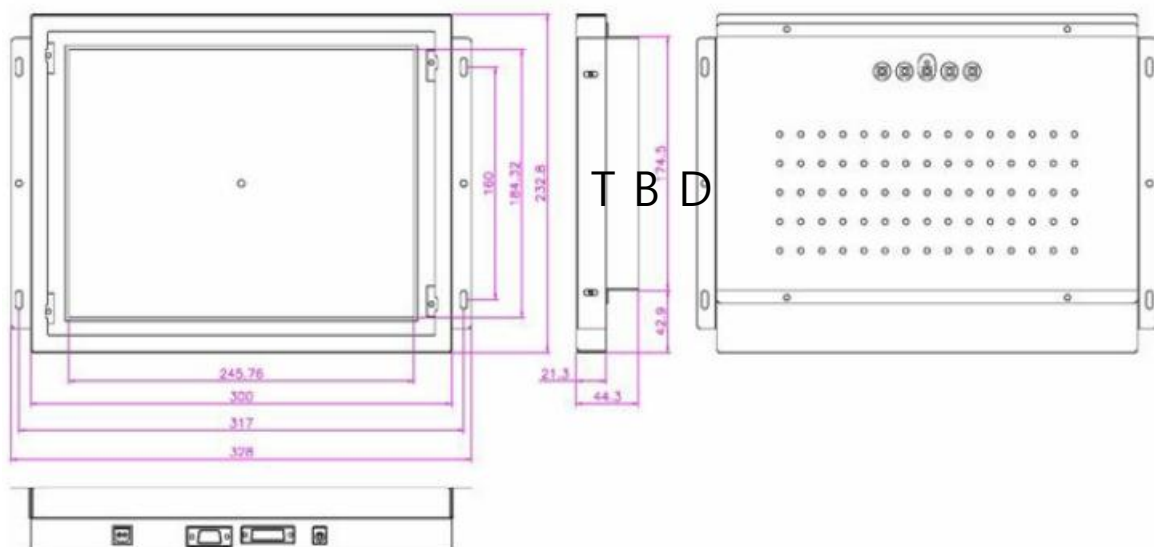

\* Specifications are subject to change without notice.

\* Drawing is subject to change according to the specification