PCAP TOUCH MONITOR

□ Specification

| Model Name | TSOPA-1700-PCT |
|-------------------------|---|
| Size | 17 inch |
| Active Area(mm) | 337.920(H) X 270.336(V) |
| Pixel Pitch(mm) | 0.264(H) X 0.264(V) |
| Resolution | 1280(H) X 1024(V) |
| Contrast Ratio | 1000 : 1 (Typ) |
| Display Color | 16.7M |
| Response time (R + F) | 5 ms (typ) |
| Brightness(cd/m²) | Тур. 250 |
| Viewing Angle (L/R/U/D) | 85/85/80/80 |
| Operating Temperature | 0 - 50 'C |
| Storage Temperuatre | 0 - 50 'C |
| Signal Connector | (RGB, DVI) |
| Frame | Open Frame |
| Touch Screen | PCAP - 10point |
| Power Source | 12V DC in, with External AC to DC Adapter |
| Power Consumption | 15.6 W |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Product weight | T.B.D |
| Packing Information | T.B.D |




| < Option > | |
|---------------------|----------------------------------|
| Signal Connector | HDMI, DP, S-Video, CVBS |
| Power source | DC 24V, AC 110~220V |
| Frame type | Chassis, Panel Mount, Rack Mount |
| Touch Screen | - |
| Dimming | Auto, Knob, Manual |
| temperature control | Heating , Cooling |

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

^{*} Specifications are subject to change without notice.

Mechanical Drawing

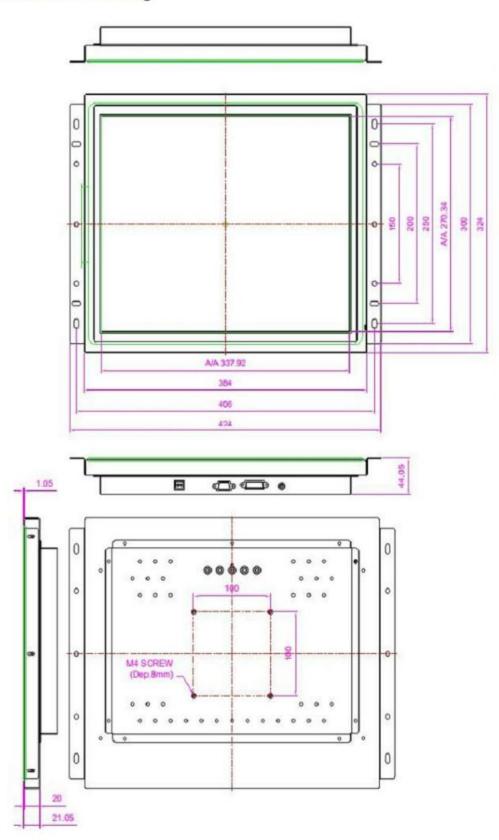

 $^{*\} Specifications\ are\ subject\ to\ change\ without\ notice.$