

IR TOUCH MONITOR

Specification

Model Name	TSOPA-1040-IR
	10.4 inch
Active Area(mm)	211.2(H) X 158.4(V)
Pixel Pitch(mm)	0.264(H) X 0.264(V)
Resolution	800(H) x 600(V)
Contrast Ratio	500 : 1 (Typ)
Display Color	16.2M/262K
Response time (R + F)	16 ms (typ)
Brightness(cd/m ²)	Typ. 230
Viewing Angle (L/R/U/D)	80/80/60/70
Operating Temperature	0 - 50 °C
Storage Temperature	0 - 50 °C
Signal Connector	(RGB, DVI)
Frame	Open Frame
Touch Screen	IR
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	TBD
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	TBD
Packing Information	TBD



< Option >

Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Chassis, Panel Mount, Rack Mount
Touch Screen	-
Dimming	Auto, Knob, Manual
temperature control	Heating , Cooling


* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

* Specifications are subject to change without notice.

OUCH MONITOR

Mechanical Drawing

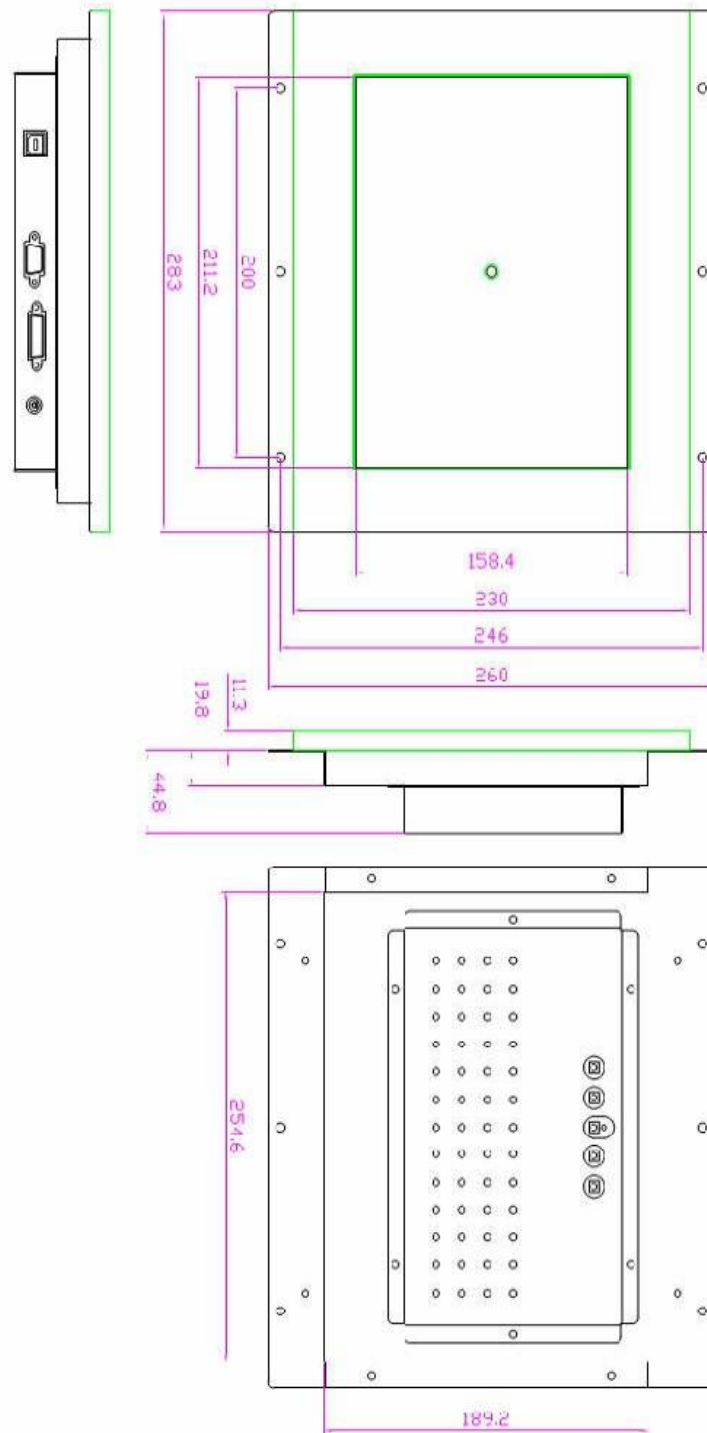

* Specifications are subject to change without notice.