



SPECIFICATION

	55"Industrial Chassis Frame 4K LCD Monitor
MODEL	TSUH
PRODUCT MODEL NAME	TSUH-5515
CUSTOMER	
DATE	2020-03-22

APPROVED BY TOUCH AND DISPLAYS CO.,LTD	
ENGINEER	Kyeong Min Lee
REVIEWER	 <small>Touch & Displays Co., Ltd. Sung-Hyun Kim Managing Director</small>
CONFIRMED	



MONITOR

Key Feature


- Quadruple than FHD resolution 4K Resolution
- LED Backlight Shows brilliant , clear, accurate, high-quality image
- Brightness(optional)
- Low Power Consumption
- BL MTBF: 50,000 hours
- IPS(Wide Viewing Angle LCD
- Wall Mount Bracket(Optional)
- PCAP touch screen(Optional)

ITEMS	SPECIFICATION	
LCD	Size	55" TFT LCD, LED Back light
	Resolution	3840X2160@80Hz (4K)
	Contrast Ratio	4000:1(Typ)
	Display Color	10bit(8bit+FRC)
	Response Time	6.5ms(Typ)
	Brightness(cd/m2)	450cd/m2
	Viewing Angle(L/R/U/D)	89'/89'/89'/89'
	Operating Temperature	0'~50'C
	Storage Temperature	0~50'C
	Panel Interface	LVDS
	Frame	Open Frame VESA mount/Open mount Bracket
	Signal Connector	HDMI.RGB
	IO Ports	Power source
Speaker		Optional
	Video Audio	1xHDMI

DQ : TDS200322-J01

IO Ports Mechanical	Video	1X DP (Optional)
	Audio	1XDVI-D, DVI-I(optional)
	Enclosure	
	Speaker	Optional
Touch Screen(option al)	PCAP touch	10 point multi touch
	Touch Chip: EETI/Llitek/Weida	EETI controller
Accessories		1x24v dc cable, 1x3m HDMI cable, 1x 3m USB cable 100~240V AC to DC Adapter Power Cord
Weight (Net)		47kg

MECHANICAL DRAWING

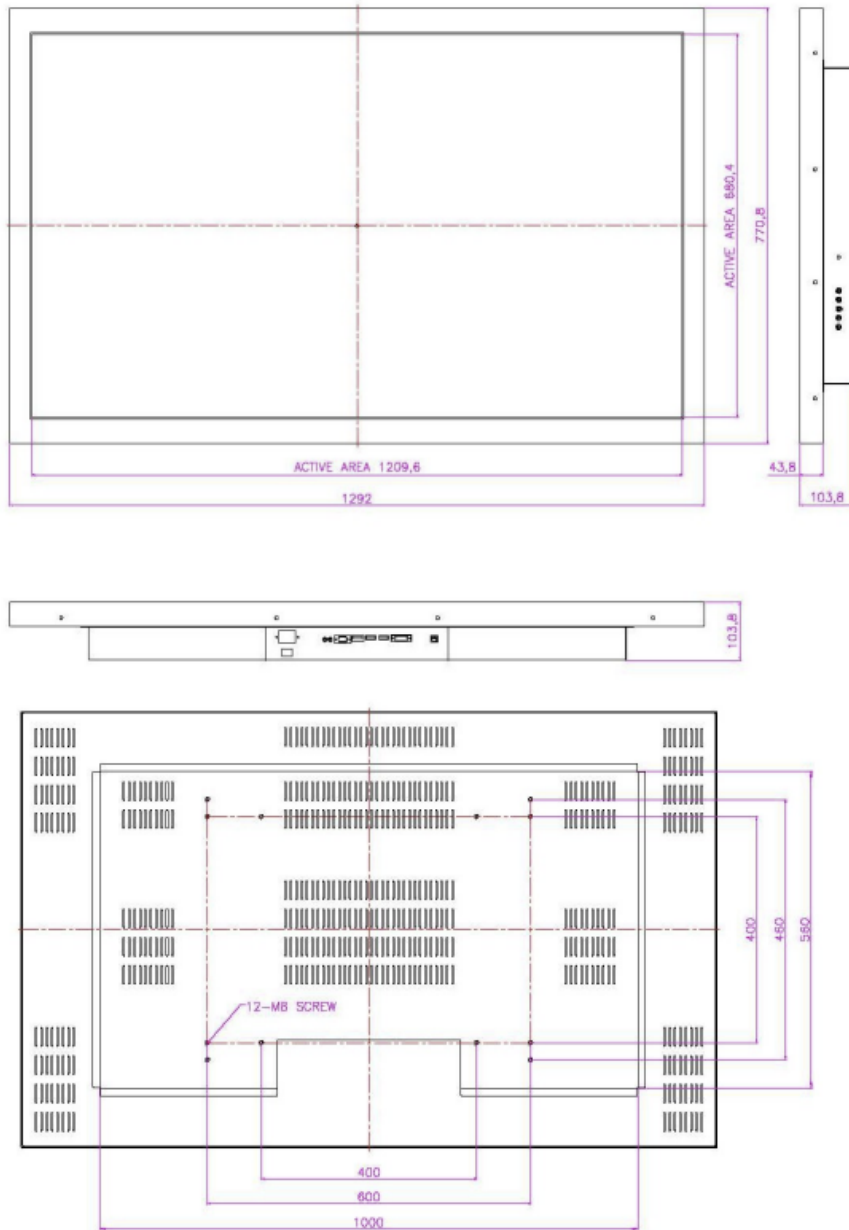

NOTE

1. This is a simplified drawing, and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O , please contact our Team(TDS) for more information.