



SPECIFICATION

	Industrial Penel PC All in One Touch Monitor
MODEL	TSPC
PRODUCT MODEL NAME	TSPC-156-W2
CUSTOMER	
DATE	2020-03-22

APPROVED BY TOUCH AND DISPLAYS CO.,LTD	
ENGINEER	Kyeong Min Lee
REVIEWER	 <small>Touch & Displays Co., Ltd. Sung-Hyun Kim Manager Director</small>
CONFIRMED	



Key Feature

This industrial Touch Screen Panel PC All in One Linux 15.6inch. This industrial panel PC with touch screen designed with good looking and ultra-thin front bezels, only 3mm, well for embedding into cabinet, console and other equipment. It comes with 4 / 5-wire resistive or ten-point multi projective capacitive touch screens, IR touch also offer non-touch screen for some customers.

CPU Option : J1900 , J4125, J6412





i3-6100U ,i3-8145u,i3-10110u,
 i5-6200u, i5-7200u,i5-8262u,i5-10210u,
 I7-6500U,I7-7500U,I7-8565U,I7-10510U

For RAM: 4g/8g /16G RAM.

For Hard Disk: 64G/128G/256G/512G SSD, or 500G/1T HDD.

Screen	Screen size	15.6inch
	Model	TSPC-156-W2
	Resolution	1920x1080
Motherboard	CPU	Intel® Celeron® Process J4125 , 4 Cores,4Threads,Base Frequency 2.00 GHz, Burst Frequency 2.70 GHz, fanless ,Memory: 4GB DDR4 (optional Intel H81 equipped with Core i3/i5/i7)
	Hard Disk	128G SSD (Optional 256/512G SSD)
	Momery	4G DDR4 (supports 8G)
	Audio	Integrated Audio Chip
	Network	Integrated Gigabit LAN
	Wireless Network	built-in wifi antenna, support wireless connection
	Graphics Cards	Intel HD Graphics
	System	Window 7 Professional Ultimate, Window 10 Professional/Enterprise/Home, Ubuntu 16.04.7/Ubuntu 18.04.6/Ubuntu 20.04/Centos 7.4 /Centos 7.8/Redhat7.4/Debian7.0/Centos7.6
	Board pressure	With wide voltage(12V~36V)
	SIM	1*SIM, Supporting various formats (Depending on 3G/4G module)
Speakers	Available	
Interface	USB interface	USB2.0*3, USB3.0*1
	Serial Interface	COM*2, Default 2* RS232 Protocol, Can Change 422/485 Protocol
	WIFI connector	WIFI antenna*2 2.4GHz/GHz, Dual frequency Wifi
	Power Interface	DC 12V*1
	High-definition Interface	HDMI, Supporting HDMI data output, up to 4K
	Extended display	VGA*1, support for synchronous dual display and differential display
	Network Interface	1*LAN, 10M/100M/1000M adaptive Ethernet ,RJ45
	Camera	M1,M5 Camera(optional)
	MIC	Front MIC(optional)
	Audio Interface	Audio I/O
	Bluetooth	BT4.0 (Optional)
	Support extensions	Multiple industry interface support customization
Display	Color	16.7M
	Point distance	0.264mm
	Screen Panel	Industrial control panel
	Contrast	800:1
	Display brightness	300cd/m2
	View angle	85/85/85/85
	Backlight type	LED-backlit screen Lifetime ≥ 50000h
	Gray-scale response time	5ms
	Touch Optional	Resistive/Projective Capacitive/Mouse Control
	Installation method	Embedded, desktop, wall-mounted, VESA
	Power	12V-5A Professional External Power Adapter
Power consumption	≤60W	
Working temperature	-10°C ~ 60°C	
Storage temperature	-20°C ~ 60°C	

Other	Relative humidity	0%-65% (without condensation)
	Material	Full body made of aluminum alloy material
	Color	Silver / Black/Optional
	Warranty Policy	Three-year warranty in all, one year for free
	Degree of protection	Front panel IP65 dustproof and waterproof
	Packing Accessories	Industrial Tablet PC / Mounting Accessories / Power Cord / Power Adapter / Driver CD / Manual / Warranty Card
MECHANICAL DRAWING		

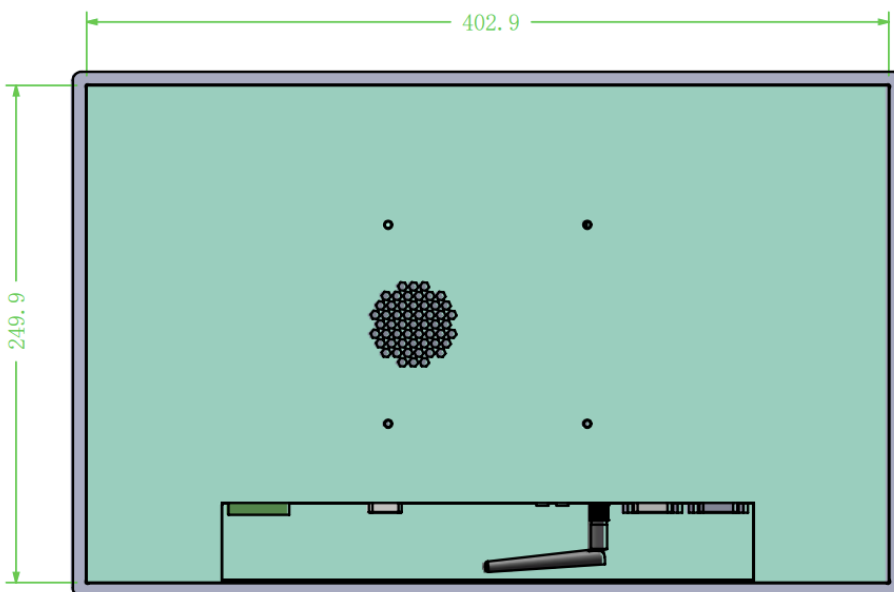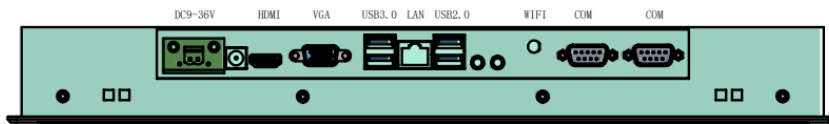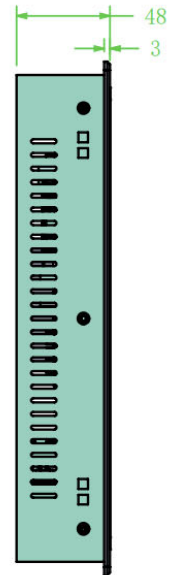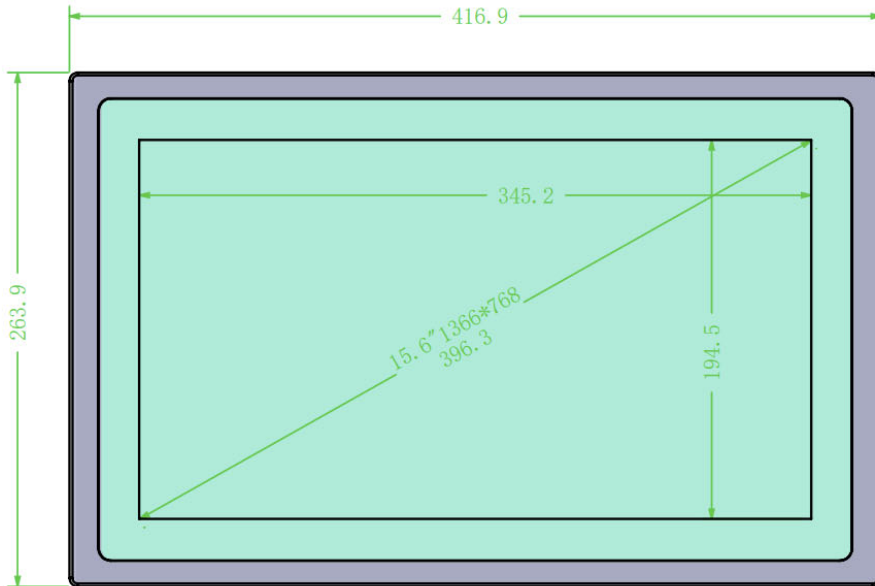

Don't need to pay high prices for a high-quality industrial monitor