OPEN FRAME MONITOR

□ Specification

Model Name	TSOPA-W2201
Size	22 inch Wide
Active Area(mm)	473.76(H) X 296.1(V)
Pixel Pitch(mm)	0.282(H) X 0.282(V)
Resolution	1680(H) X 1050(V)
Contrast Ratio	2000 : 1 (Typ)
Display Color	16.7M
Response time (R + F)	20 ms (typ)
Brightness(cd/m²)	Тур. 250
Viewing Angle (L/R/U/D)	89/89/89
Operating Temperature	0 - 50 'C
Storage Temperuatre	0 - 50 'C
Signal Connector	(RGB, DVI)
Frame	Open Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	29W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	5.2 Kg
Packing Information	650x160x450(H)mm (1pcs/ 7Kg)




< Option >	
Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Chassis, Panel Mount, Rack Mount
Touch Screen	PCAP, IR, RES, SCAP, Glass
Dimming	Auto, Knob, Manual
temperature control	Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

OPEN FRAME MONITOR

Mechanical Drawing

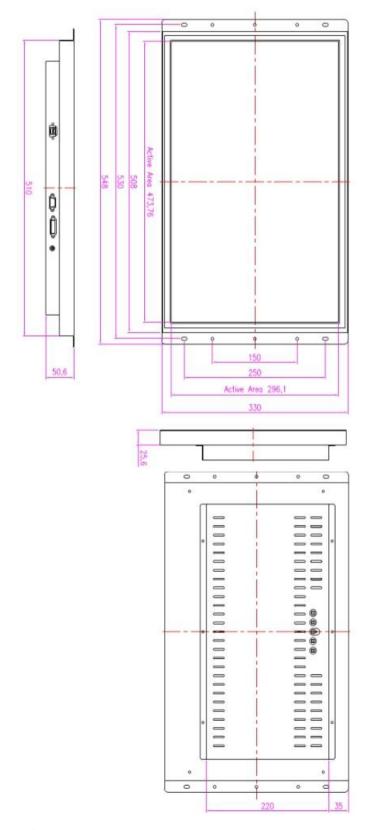

 $^{* \} Specifications \ are \ subject \ to \ change \ without \ notice.$