

CHASSIS FRAME MONITOR

Specification

Model Name	TSCHA-0840
	8.4 inch
Active Area(mm)	170.4(H) X 127.8(V)
Pixel Pitch(mm)	0.213(H) X 0.213(V)
Resolution	800(H) X 600(V)
Contrast Ratio	600 : 1 (Typ)
Display Color	262K, 16.2M
Response time (R + F)	30 ms (Typ)
Brightness(cd/m ²)	250 (Typ)
Viewing Angle (L/R/U/D)	80 / 80 / 80 / 60
Operating Temperature	0 - 50 'C
Storage Temperuatre	0 - 50 'C
Signal Connector	(RGB, DVI)
Frame	Chassis Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	8.9W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	1.4 Kg
Packing Information	390x330x130(H)mm (1pcs/ 3.5Kg)



< Option >


Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Open, Panel Mount, Rack Mount
Touch Screen	PCAP, Resistive, Glass
Dimming	Auto, Knob, Manual
temperature control	Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)
- High-brightness monitor : 50% Dimming (5%, Zero Dimming : please ask to Sales team)

CHASSIS FRAME MONITOR

Mechanical Drawing

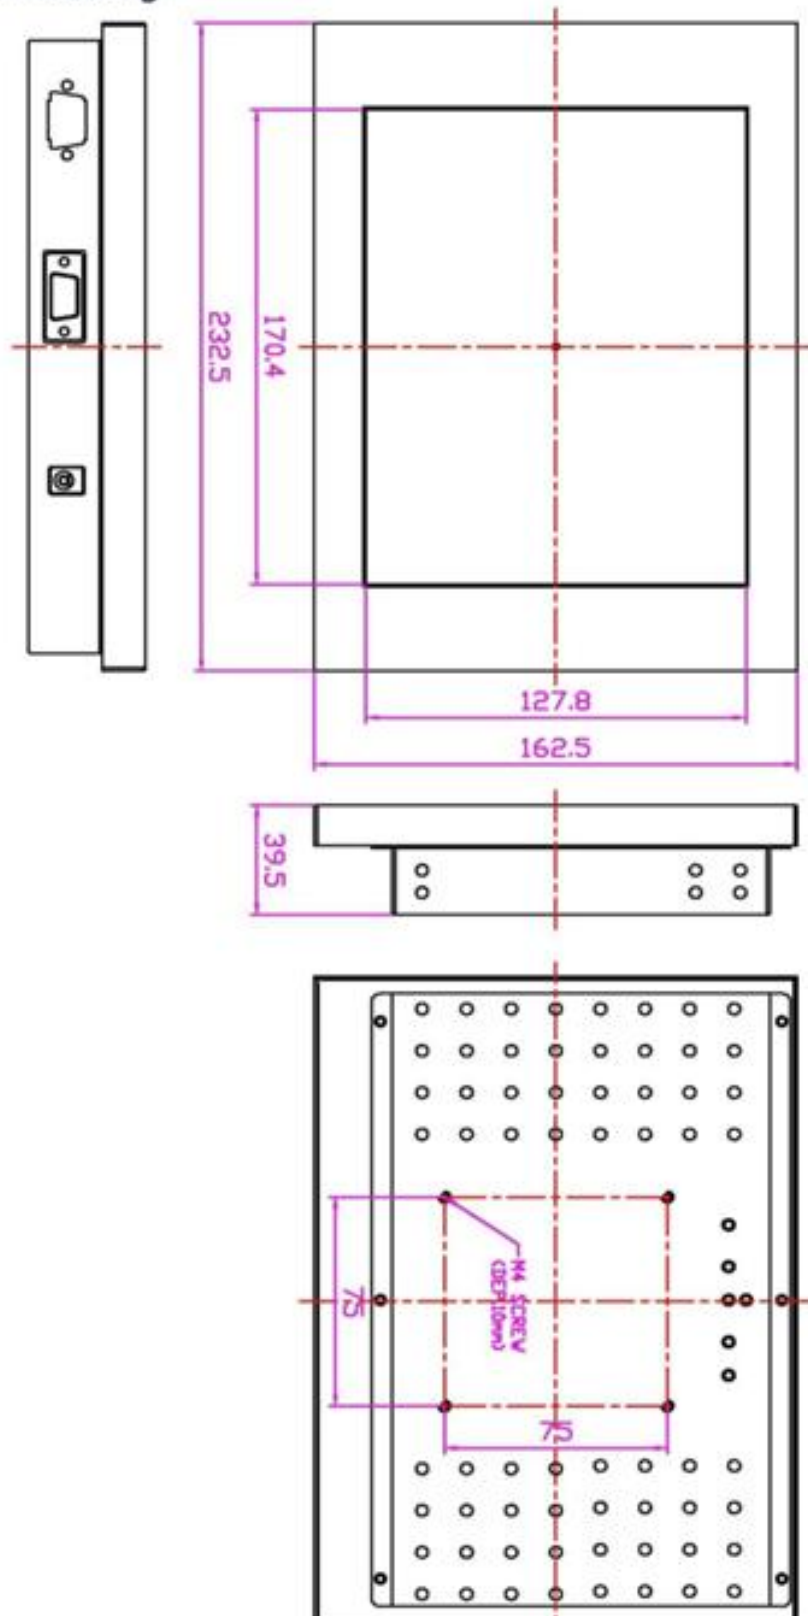

* Specifications are subject to change without notice.