

HIGH BRIGHTNESS MONITOR

Model Name	TSVH-W1730
Size	17.3 inch Wide
Active Area(mm)	381.888(H) X 214.812 (V)
Pixel Pitch(mm)	0.1989 (H) X 0.1989 (V)
Resolution	1920(H) X 1080 (V)
Contrast Ratio	600 : 1 (Typ)
Display Color	16.7 M
Response time (R + F)	40 ms (typ)
Brightness(cd/m²)	Min. 900
	Typ. 1000
Viewing Angle (L/R/U/D)	80 / 80 / 60 / 80
Operating Temperature	0 - 50 'C
Storage Temperuatre	-20 - 60 'C
Signal Connector	VS-00TS (RGB, DVI)
Frame	Open Frame
Power Source	12V DC in, with External AC to DC Adapter
Power Consumption	32 W
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Product weight	T.B.D
Packing Information	T.B.D




< Option >

Signal Connector	HDMI, DP, S-Video, CVBS
Power source	DC 24V, AC 110~220V
Frame type	Chassis, Panel Mount, Rack Mount
Touch Screen	Resisitve, PCAP, Glass
Dimming	Auto, Knob, Manual
Temperature control	Heating , Cooling

* Dimming

- Industrial monitor : 5% Dimming (Zero Dimming : please ask to Sales team)

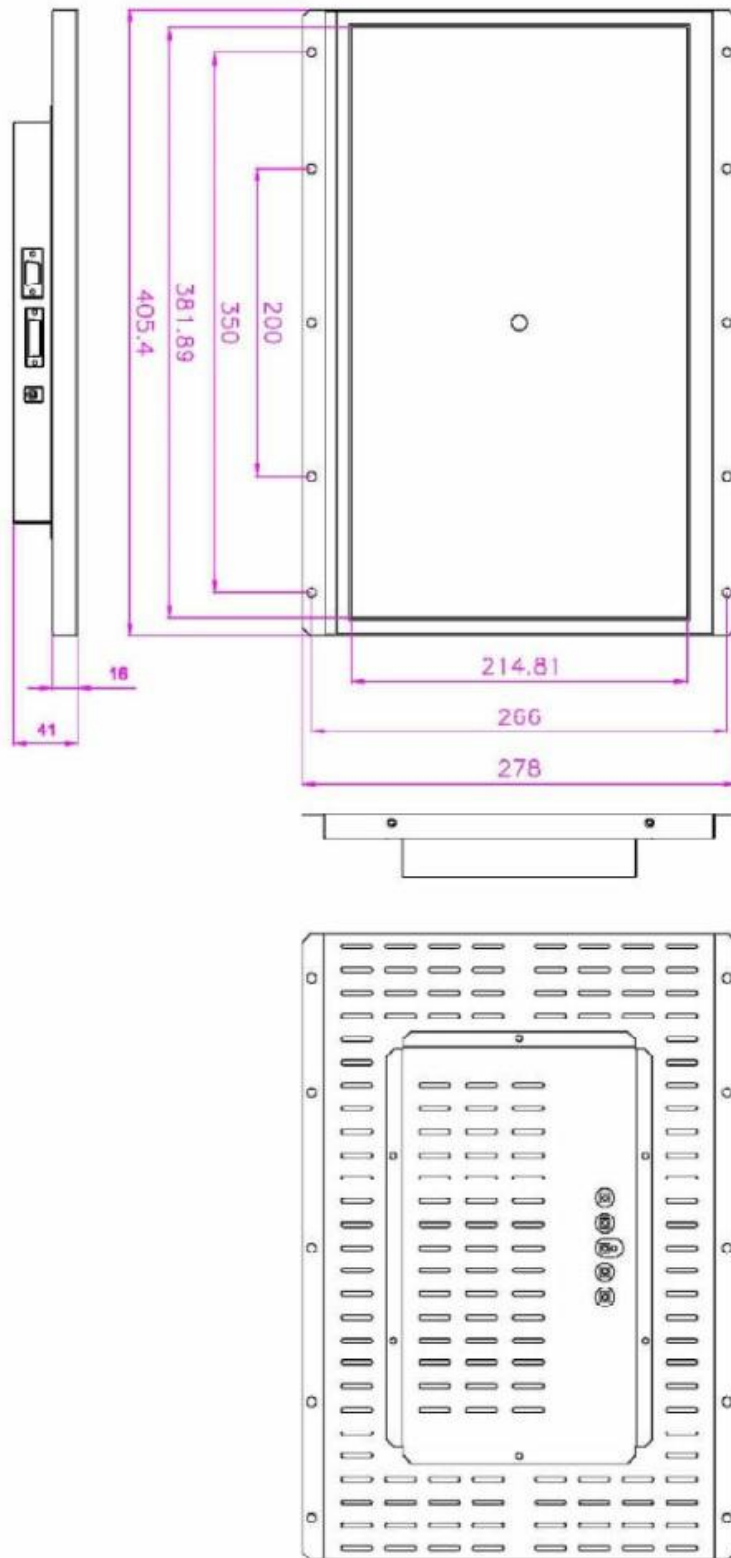

* Drawing is subject to change according to the specification